

# Catalog 2021

# PRODUCTS


VIENA®  
SCHIELE®

Factory : +98 13 444 03 643  
Head office : +98 21 228 728 04-5  
[visenaelectric.ir](http://visenaelectric.ir)  
[info@visenaelectric.ir](mailto:info@visenaelectric.ir)

Head office address:  
Unit 4, No. 11, Mohammadpour Alley, Mosavi St., Ferdowsi Sq., Tehran, Iran

Factory address:  
No. 16, Niloofar St., No 1 Anzali Industrial City Free Zone, Iran

# BACK LIGHT

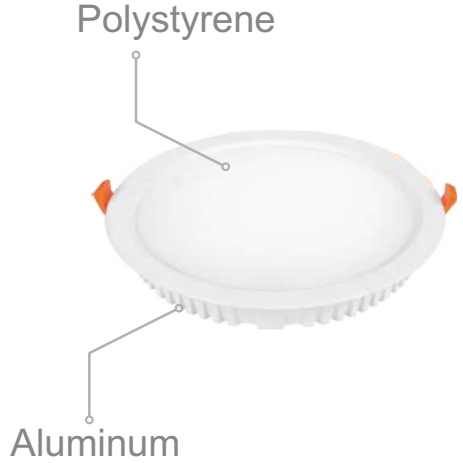

## Specification:



Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Hole Size	Size	Per CTN
SCNSMD	7.5	85 - 265 VAC	4cm	80	600	7.5cm	10cm	50
	16	85 - 265 VAC	4cm	80	1280	9.5cm	12cm	50
	24	85 - 265 VAC	4cm	80	2160	14.5cm	17cm	20
	42	85 - 265 VAC	4cm	80	3780	19cm	23cm	20



# BACK LIGHT GLASS



## Specification:



Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Hole Size	Size	Per CTN
SCGSR	12	85 - 265 VAC	4cm	80	960	12cm	16cm	20
	18	85 - 265 VAC	4cm	80	1260	16cm	20cm	20
	24	85 - 265 VAC	4cm	80	1920	20cm	24cm	10



# BACK LIGHT

## GLASS



### Specification:



Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Hole Size	Size	Per CTN
SCGSQ	6	85 - 265 VAC	4cm	80	480	7x7cm	10x10cm	30
	12	85 - 265 VAC	4cm	80	960	12x12cm	16x16cm	20
	18	85 - 265 VAC	4cm	80	1260	16x16cm	20x20cm	20
	24	85 - 265 VAC	4cm	80	1920	20x20cm	24x24cm	10



# DOWN LIGHT

## DEEP




### Specification:



Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Hole Size	Size	Per CTN
VSFCOB	10	85 - 265 VAC	6.5cm	80	850	9.5cm	12cm	40
	20	85 - 265 VAC	7.5cm	80	1700	14.5cm	17cm	20
	30	85 - 265 VAC	11cm	80	2700	20.5cm	23cm	10
	50	85 - 265 VAC	11cm	80	4500	20.5cm	23cm	10
	80	85 - 265 VAC	13cm	80	8000	20.5cm	23cm	10



# SURFACE PANEL LINEAR

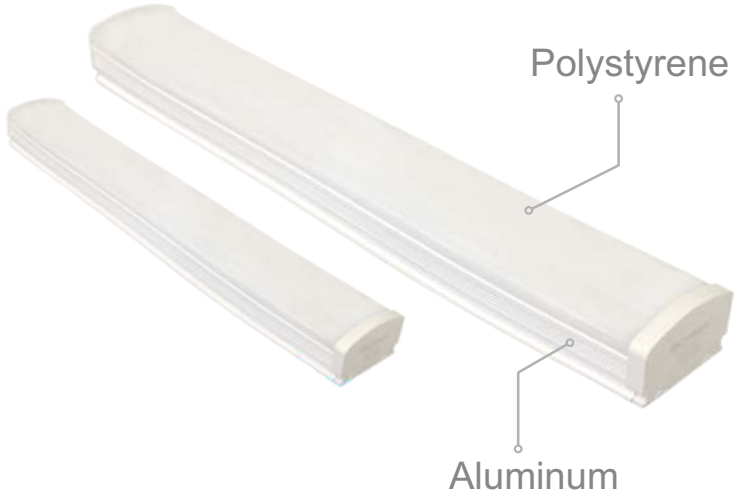

## Specification:




Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Hole Size	Size	Per CTN
SCLINEAR	30	85 - 265 VAC	4cm	80	2400	-	60x6cm	24
	60	85 - 265 VAC	4cm	80	4800	-	120x6cm	12

CHIP SMD	CE	RoHS	<del>Pb</del>	<del>Pb</del>	Beam Angle 180°	6000K 4500K	15000h	PF 0.5	IP 20	CRI 80
-------------	----	------	---------------	---------------	--------------------	----------------	--------	-----------	----------	-----------

# Rope Light

## Flexible

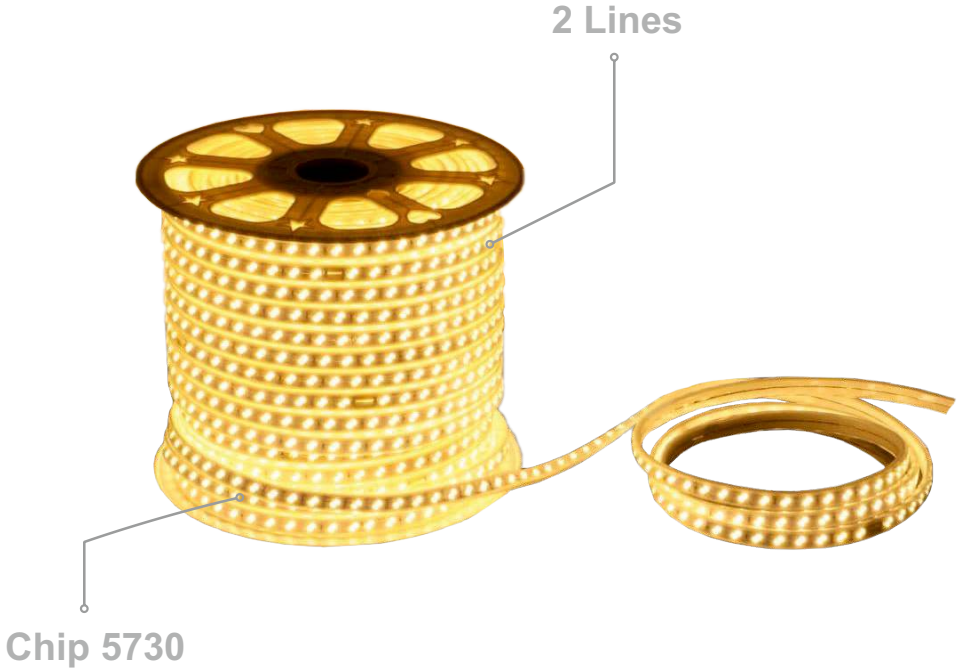

### Specification:




Model	Watt (w) Per meter	Voltage (v)	Dept	Ra	Lumen Per meter	Hole Size	Size	Per CTN
VSST-5730	7	220	0.7cm	80	420	20.5cm	23cm	100m




# SENSOR LIGHT

## Round

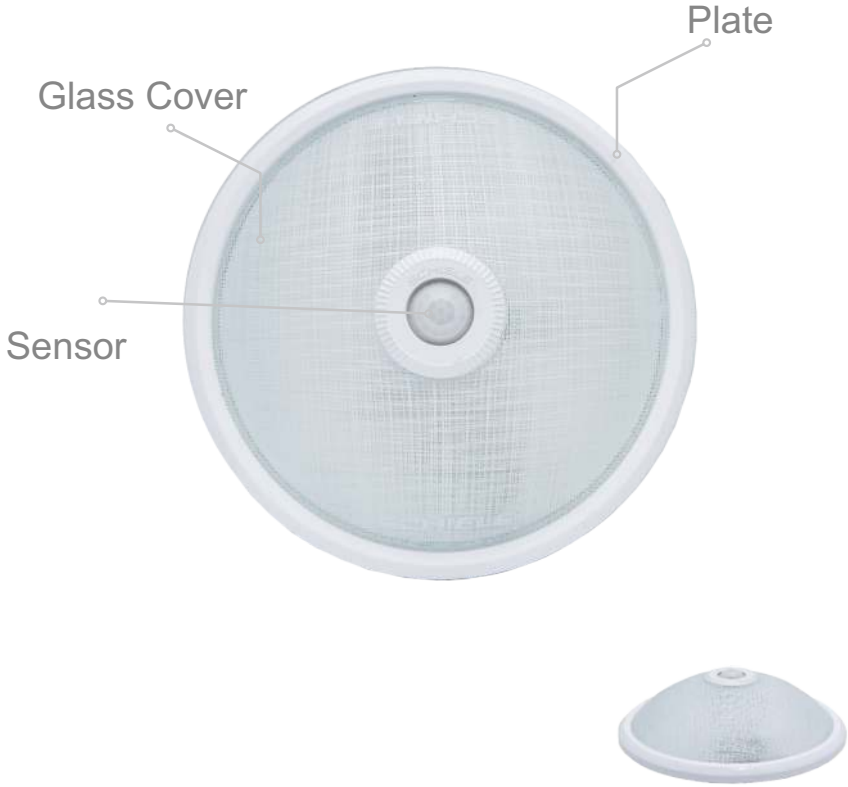

### Specification:

Model	Watt (w)	Sensor Type	Voltage (v)	Dept	Coverage Angle	Size	Per CTN
SC 888	 2x9W	PIR	85 - 265 VAC	9.5cm	360°	29x9.5cm	8






# SENSOR LIGHT

## Round



### Specification:

Model	Watt (w)	Sensor Type	Voltage (v)	Dept	Coverage Angle	Size	Per CTN
SC 886	 2x9W	PIR	85 - 265 VAC	9.5cm	360°	29x9.5cm	8



# SENSOR LIGHT

Round


Glass Cover



Plate



## Specification:

Model	Watt (w)	Sensor Type	Voltage (v)	Dept	Coverage Angle	Size	Per CTN
SC 890	 2x 9W	-	85 - 265 VAC	9.5cm	360°	29x9.5cm	8



# SENSOR LIGHT

## Round



### Specification:



Model	Watt (w)	Sensor Type	Voltage (v)	Dept	Coverage Angle	Size	Per CTN
SC 976	15W	PIR	85 - 265 VAC	7cm	360°	29x7cm	8
SC 976E	15W	PIR	85 - 265 VAC	7cm	360°	29x7cm	8




# SENSOR LIGHT

## Square



### Specification:



Model	Watt (w)	Sensor Type	Voltage (v)	Dept	Coverage Angle	Size	Per CTN
SC 890	 15W	-	85 - 265 VAC	9.5cm	360°	29x9.5cm	8

HMP | PP  

# BACK LIGHT DEEP

## AC



### Specification:




Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Hole Size	Size	Per CTN
VSD0B	7	180 - 265 VAC	4cm	80	530	7.5cm	10.5cm	100



# SURFACE PANEL

## Round

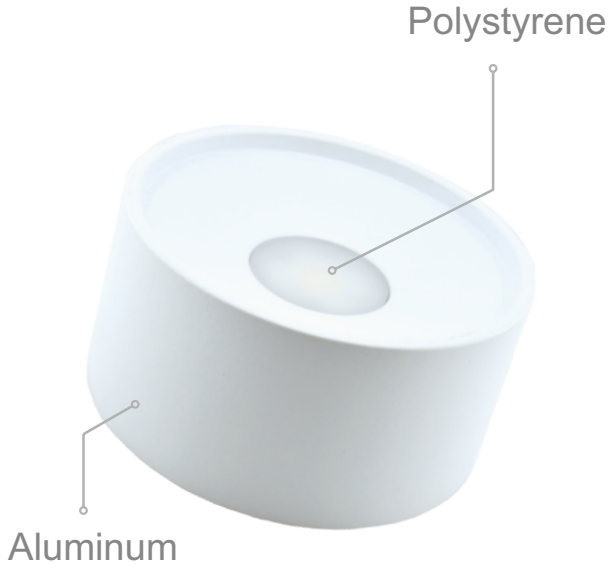

### Specification:



Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Hole Size	Size	Per CTN
SCSCOB	15	85 - 265 VAC	6cm	80	1200	-	11.8x6cm	20

CHIP COB	CE	RoHS	<del>Pb</del>	<del>Pb</del>	Beam Angle 160°	4500K 6000K	15000h	PF 0.6	IP 20	CRI 80
-------------	----	------	---------------	---------------	--------------------	----------------	--------	-----------	----------	-----------

# FLOOD LIGHT

AC



## Specification:

Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Size	Per CTN
VSFD	25	180 - 265 VAC	3.4cm	80	2500	17×15cm	20
	45	180 - 265 VAC	4.2cm	80	4500	39×20cm	10
	75	180 - 265 VAC	4.4cm	80	7500	27×24cm	10
	120	180 - 265 VAC	5.2cm	80	12000	31×28cm	5
	150	180 - 265 VAC	6.5cm	80	15000	35×31cm	5



# TRACK LIGHT

## Surface



### Specification:



Model	Watt (w)	Voltage (v)	Dept	Ra	Lumen	Beam Angle	Size	Per CTN
SCTRW/B	20	85 - 265 VAC	6.5cm	80	1600	24°	8.8x11cm	10
	30	85 - 265 VAC	7.5cm	80	2400	36°	10x12cm	10
	50	85 - 265 VAC	11cm	80	4000	36°	11x15cm	10





# MCB



## Specification:

Model	Code	Curve	Curent	$I \Delta C$	IP	Per CTN
VS6 1 Pole	1B/1C-06	B / C	06	6000	20	120
	1B/1C-10	B / C	10	6000	20	120
	1B/1C-16	B / C	16	6000	20	120
	1B/1C-20	B / C	20	6000	20	120
	1B/1C-25	B / C	25	6000	20	120
	1B/1C-32	B / C	32	6000	20	120
	1C-40	C	40	6000	20	120
	1C-50	C	50	6000	20	120
	1C-63	C	63	6000	20	120
2 Pole	2C-25	C	25	6000	20	60
	2C-32	C	32	6000	20	60
3 Pole	3C-25	C	25	6000	20	40
	3C-32	C	32	6000	20	40
	3C-40	C	40	6000	20	40
	3C-50	C	50	6000	20	40
	3C-63	C	63	6000	20	40